

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 23 TOWNSHIP 16 RANGE 3

DATE: 11-14-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison fd

METHOD OF ESTABLISHMENT: County: 6-9-02

IN. S.P.C. E ZONE NAD '83

NAME: 16032302


N: 508179.0392(m)

E: 57019.3106(m)


Address 540W 38th

W. 38th Street


E-bound in middle
of lane

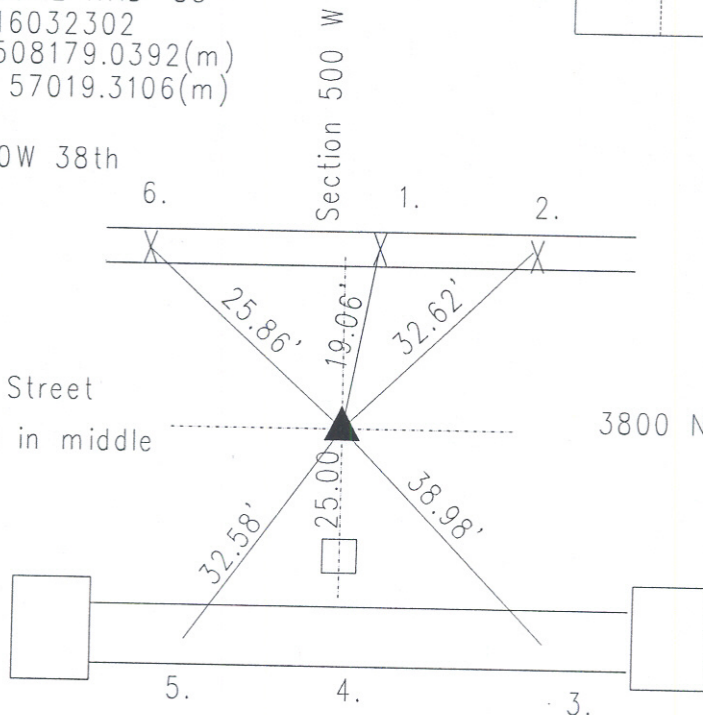

38th St. 3800 N

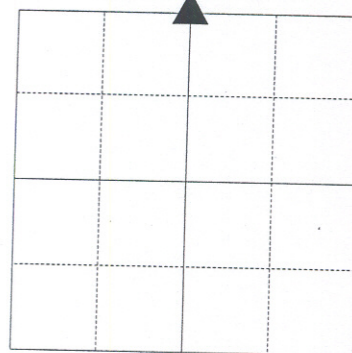

Illinois Street 100 W



Original post set 1820 by Laughlin with witness: 12" hickory S 69 W 7 links; 14" beech N 77 E 16 links per Marion County Atlas pg. 7. Survey ties this area 8-24-1866 called no stone nor witness per Center Township Legal Survey Book pg. 6. Establishing this corner we used the Crown Hill Cemetery boundary by P.B. Middleton Co. Engineers in 1938. The concrete boundary marker was found in this survey. The Highway park Subdivision plat was also used per Plat Book 23, pg. 3. Legal Survey distances were also used. 10-19-97 a copperweld was set as the corner by Wilcoxon. Re-tied 6-9-02 by Wilcoxon. Re-tied 11-14-07 by Wilcoxon. Harrison '02. Re-tied '07.

16032302

REF.	DISTANCE	DESCRIPTION
1.	19.06'	Cut 'x' in curb
2.	32.62'	Cut 'x' in curb
3.	38.98'	Cut 'x' top limestone slab on fence line
4.	25.00'	Due S to 4"x4" concrete monument with cut 'x'
5.	32.58'	Cut 'x' top limestone slab on fence line
6.	25.86'	Cut 'x' in curb